


High performance Oil Separator for Grease trap

Oil removal

- Oil and SS separator for pre-treatment of waste water treatment.
- Grease trap cleaning for canteen, food factory.

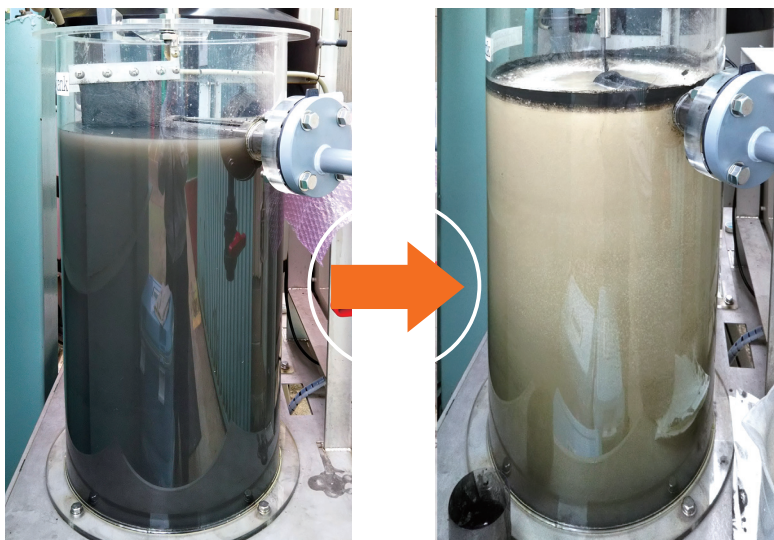

- ◆ Metal work / surface treatment.
- ◆ Mold cleaning
- ◆ Pre-treatment of Waste water treatment
- ◆ Compressor drainage

● Function


Production process



Oil containing waste water




G-ace



Separated Oil


Automatically Operation

Trouble of waste oil cleaning, source of odor, pipe clogging, increasing load to the waste water treatment, etc.

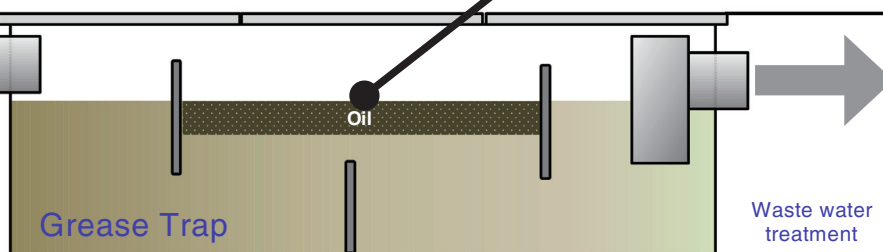

Waste water treatment



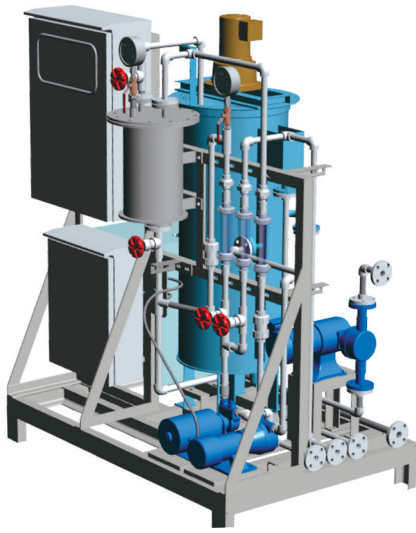

● Specification

	G-ace 50	G-ace series
Capacity	50 L/H	500 - 2000 L/day
Power Supply	3Phase / 380V / 50Hz / 2.1kw	3Phase / 380V / 50Hz
Dimension (mm)	W1360 x D900 x H1700	-
Weight	450 kg	-


● Performance

Items	Inlet	Treated
COD	420	100
BOD	150	20
SS	970	12
Mineral Oil	280	4



- ◆ High removal rate by using Ozonized-Air micro bubble
- ◆ Automatically operation

● System

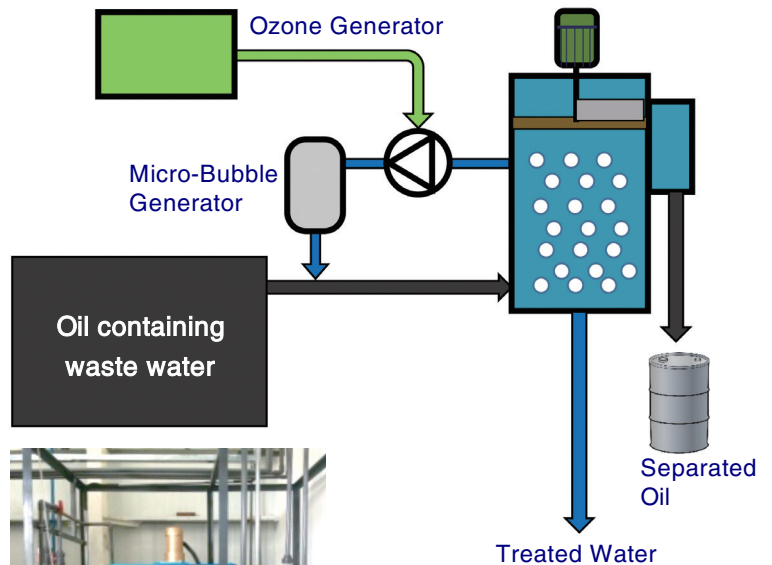

協和機電工業株式会社
Kyowakiden Industry Co.,Ltd.

10-2 Kawaguchi-machi, Nagasaki-shi, Nagasaki, 852-8108, JAPAN
TEL : +81-95-848-7788 FAX : +81-95-848-5305
info_overseasbiz@kyowa-kk.co.jp

協和機電工業株式会社
KYOWAKIDEN VIETNAM CO., LTD
Ho Chi Minh Sales Office

9th Floor, CJ Building, No.6 Le Thanh Ton street, Ben Nghe Ward,
District 1, Ho Chi Minh City, Vietnam
TEL : +84-28-6255-6843